



SCREENERS

The Metalomarão Screeners are designed to operate under the toughest environmental conditions, operating by dry or wet way through the needs of each project.

Good selection of amplitude and allied rotation to the robustness of construction ensure their efficiency. Selection of meshes to be applied depends on the type and particle size of materials to be processed.

Contains a system of weights at the end of the mechanical center can be set to a higher or lesser amplitude.

They are also characterized by their simplicity of construction combined with efficient performance.


The screeners can be grease lubrication and/or oil lubrication, depending on the range of screeners to be used.

SCREENERS



SCREENERS	Dimensions (mm)	Area (m ²)	Power (kW)	Weight (kg)			Rotation (rpm)
				2 Decks	3 Decks	4 Decks	
CR.30.12	3000x1250	3.8	11	2500	2750	3000	750 – 1050
CR.40.15	4000x1500	6	15 – 18.5	4250	4875	5500	750 – 1050
CR.45.18	4500x1800	8	18,5 – 22	5750	6750	7750	750 – 1050
CR.50.20	5000x2000	10	18.5 – 22	6250	7500	8750	750 – 1050
CR.60.20	6000x2000	12	22 – 30	7500	9000	10500	750 – 950
CR.66.21	6600x2100	13.8	30 – 37	7750	10000	-	750 - 950
CR.72.24	7200x2400	17.3	2x18.5 – 2x22	9740	12820	-	750 - 950

Notes: Other measures on request.

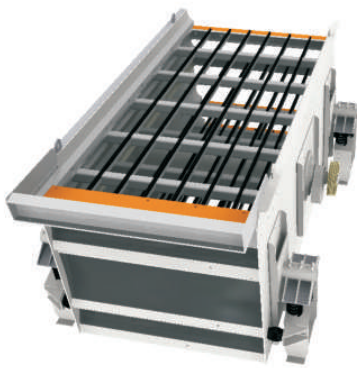

METALOMARÃO
Equipamentos para a indústria extrativa, S.A.

Rua de Mem Gundar, nº1048
Apartado 78
4600-642 Gondar - Amarante | Portugal

T +351 255 420 580
F +351 255 420 589

geral@metalomarao.pt
www.metalomarao.pt

GPS: Latitude: 41°15'14.93"N
Longitude: 8° 1'56.22"W

E01|Data:2015.09