



## TROMMEL WASHERS

The Trommel Washers Metalomarão are used for washing/ disaggregation of aggregates, having a simple principle of operation and low maintenance, allow optimal efficiency for washing, disaggregation and separation of materials, namely, clay materials and work in counter flow ensuring optimum performance. They are mounted on their own chassis and driven by a motor and reducer with a direct transmission to a set of conventional tires make the drum rotation by traction, are equipped with modular liner, directional blades, and optional output cones.


# TROMMEL WASHERS



| TROMMEL WASHERS | Diameter (mm) | Length (mm) | H <sub>2</sub> O Required (m <sup>3</sup> /h) | Max. Feed (mm) | Power (kW) | Production (t/h) | Weight (kg) |
|-----------------|---------------|-------------|---|----------------|------------|------------------|-------------|
| LT.16.50        | 1600          | 5000        | 80  | 125            | 11         | 80 - 100         | 6500        |
| LT.22.55        | 2200          | 5500        | 160   | 175            | 22         | 160 - 200        | 12000       |

Notes: Other measures on request.

Values of production dependent of material.

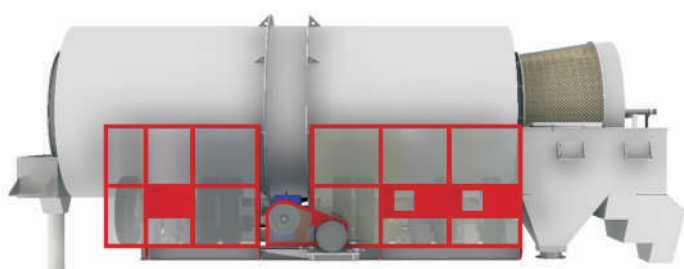

**METALOMARÃO**

Equipamentos para a indústria extrativa, S.A.

Rua de Mem Gundar, nº1048

Apartado 78

4600-642 Gondar - Amarante | **Portugal**

**T** +351 255 420 580

**F** +351 255 420 589

geral@metalomaraao.pt

**www.metalomaraao.pt**

**GPS:** Latitude: 41°15'14.93"N

Longitude: 8° 1'56.22"W

E01|Data:2015.09

The Metalomarão reserves the right to change characteristics without notice and without any liability. The information included is valid at the edition date of this document